



PHGB000162

USA



#2

INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

BEST AVAILABLE COPY


Signed

W. Evans

Dated

20 July 2001

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

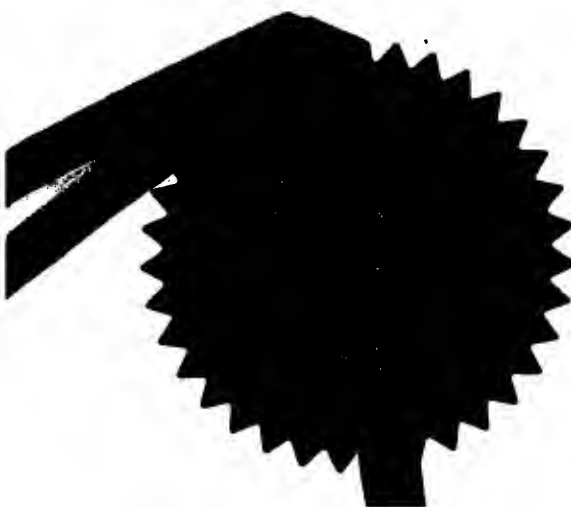

THIS PAGE BLANK (USPTO)

- 2 DEC 2000

NEWPORT

040EC00 E588483-1 D02879
P01/7700 0.00-0029424.9

1/77

Request for grant of a patent

(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office
Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference PHGB000168
2. Patent application number
(The Patent Office will fill in this part) 0029424.9 02 DEC 2000
3. Full name, address and postcode of the or of each applicant (underline all surnames)
KONINKLIJKE PHILIPS ELECTRONICS N.V.
GROENEWOUDSEWEG 1
5621 BA EINDHOVEN
THE NETHERLANDS
Patents ADP Number (if you know it)
If the applicant is a corporate body, give the country/state of its incorporation THE NETHERLANDS
75 86605002
4. Title of the invention RADIO COMMUNICATION SYSTEM
5. Name of your agent (if you have one)
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)
Patents ADP number (if you know it)
Kevin James SCOTT
Philips Corporate Intellectual Property
Cross Oak Lane
Redhill
Surrey RH1 5HA
76 88 914001
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number
Country Priority Application number (if you know it) Date of filing (day/month/year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application
Number of earlier application Date of filing (day/month/year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
(See note (d)). YES

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description	9
Claims(s)	3
Abstract	1
Drawings	1 only 12.

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents
Statement of inventorship and right
to grant of a patent (*Patents Form 7/77*)
Request for preliminary examination and
search (*Patents Form 9/77*)
Request for substantive examination
(*Patents Form 10/77*)
Any other documents
(Please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

[Signature]

Date

1st December 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 815281

(Kevin J. Scott)

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" *Patents Form 7/77* will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION

RADIO COMMUNICATION SYSTEM

5 The present invention relates to a radio communication system having a communication channel comprising a plurality of paths between a transmitter and a receiver, the transmitter comprising a plurality of antennas and the receiver comprising at least one antenna. In the present specification, path is used to refer to an individual sub-channel which is resolvable within the overall
10 radio system, and channel is used to refer to the combined totality of paths between the transmitter and the receiver.

 In a radio communication system, radio signals typically travel from a transmitter to a receiver via a plurality of paths, each involving reflections from
15 one or more scatterers. Received signals from the paths may interfere constructively or destructively at the receiver (resulting in position-dependent fading). Further, differing lengths of the paths, and hence the time taken for a signal to travel from the transmitter to the receiver, may cause inter-symbol interference.

20 It is well known that the above problems caused by multipath propagation can be mitigated by the use of multiple antennas at the receiver (receive diversity), which enables some or all of the multiple paths to be resolved. For effective diversity it is necessary that signals received by individual antennas have a low cross-correlation. Typically this is ensured by
25 separating the antennas by a substantial fraction of a wavelength, although closely-spaced antennas may also be employed by using techniques disclosed in our co-pending unpublished United Kingdom patent application 0006955.9 (applicant's reference PHGB000033). By ensuring use of substantially uncorrelated signals, the probability that destructive interference will occur at
30 more than one of the antennas at any given time is minimised.

 Similar improvements may also be achieved by the use of multiple antennas at the transmitter (transmit diversity). Diversity techniques may be

generalised to the use of multiple antennas at both transmitter and receiver, known as a Multi-Input Multi-Output (MIMO) system, which can further increase system gain over a one-sided diversity arrangement. As a further development, the presence of multiple antennas enables spatial multiplexing, whereby a data stream for transmission is split into a plurality of sub-streams, each of which is sent via a different path (or sub-channel). One example of such a system is described in United States patent 6,067,290.

The performance gains which may be achieved from a MIMO system may be used to increase the total data rate at a given error rate, or to reduce the error rate for a given data rate, or some combination of the two. A MIMO system can also be controlled to reduce the total transmitted energy or power for a given data rate and error rate.

An object of the present invention is to provide a MIMO system having improved performance.

According to a first aspect of the present invention there is provided a radio communication system having a communication channel comprising a plurality of paths between a transmitter having a plurality of antennas and a receiver having at least one antenna, wherein the transmitter comprises path characterisation means for determining at least one transmission property of each path, categorisation means for assigning a category to a set of data for transmission and means responsive to said category and said at least one transmission property for determining a coding and mapping to apply the set of data to the transmitter's antennas, thereby determining over which path or paths the data will be transmitted.

According to a second aspect of the present invention there is provided a transmitter for use in a radio communication system having a communication channel comprising a plurality of paths between a transmitter having a plurality of antennas and a receiver, wherein path characterisation means are provided for determining at least one transmission property of each path, categorisation means are provided for assigning a category to a set of data for transmission, and means responsive to said category and said at least one transmission

property are provided for determining a coding and mapping to apply the set of data to the transmitter's antennas, thereby determining over which path or paths the data will be transmitted.

According to a third aspect of the present invention there is provided a
5 method of operating a radio communication system having a communication
channel comprising a plurality of paths between a transmitter having a plurality
of antennas and a receiver having at least one antenna, the method
comprising the transmitter determining at least one transmission property of
each path, assigning a category to a set of data for transmission and
10 determining a coding and mapping to apply the set of data to the transmitter's
antennas depending on said category and said at least one transmission
property, thereby determining over which path or paths the data will be
transmitted.

The present invention is based upon the recognition, not present in the
15 prior art, that by taking account of the properties of each of the sub-channels
the properties of the overall communication link can be optimised.

Embodiments of the present invention will now be described, by way of
example, with reference to the accompanying drawings, wherein:

20 Figure 1 is a block schematic diagram of a known MIMO radio system;

Figure 2 is a block schematic diagram of a MIMO radio system made in
accordance with the present invention; and

Figure 3 is a flow chart illustrating a method of operating a MIMO radio
system in accordance with the present invention.

25 In the drawings the same reference numerals have been used to
indicate corresponding features.

Figure 1 illustrates a known MIMO radio system. A plurality of
applications 102 (AP1 to AP4) generate data streams for transmission. An
30 application 102 could also generate a plurality of data streams. The data
streams are combined by a multiplexer (MX) 104 into a single data stream,
which is further processed by a coding and mapping block (CM) 106. The CM

block may apply space-time coding to provide a mapping between data symbols to be transmitted by a transmitter (Tx) 108, together with suitable forward error correction, and multiple transmit antennas 110. The Forward Error Correction (FEC) which is applied by the CM block must therefore have
5 sufficient error-correcting ability to cope with the entire MIMO channel, which comprises a plurality of paths 112. For simplicity of illustration only direct paths 112 between antennas 110 are illustrated, but it will be appreciated that the set of paths will typically include indirect paths where signals are reflected by one or more scatterers.

10 A number of space-time coding techniques are known in the prior art and may be employed by the coding and mapping block 106. These may further include diversity and beam forming techniques to aid the selection of radio paths to the receiver. Examples of suitable techniques include but are not limited to those described in chapters 2, 5 and 8 of "Space-Time
15 Processing for CDMA Mobile Communications", van Rooyen et al, Kluwer Academic Publishers 2000.

A receiver (Rx) 114, also provided with a plurality of antennas 110, receives signals from the multiple paths which it then combines, decodes and demultiplexes to provide respective data streams to each application. Although
20 both the transmitter 112 and receiver 114 are shown as having the same number of antennas, this is not necessary in practice and the numbers of antennas can be optimised depending on space and capacity constraints. Similarly, the transmitter 108 may support any number of applications (for example, a single application on a voice-only mobile telephone or a large
25 number of applications on a PDA).

A problem with such a known MIMO system is that it takes no account of the fact that the various paths 112 between transmitter 108 and receiver 114 will differ in their impulse responses, resulting in differences in Signal-to-Noise Ratio (SNR) and time delay. The number of paths 112 which can be
30 used is restricted by the quality of available paths.

In a system made in accordance with the present invention, a data stream is mapped to the different transmit antennas 110 according to the differing requirements of individual portions of data.

5 In order to implement such a system, prior knowledge of the characteristics of the different paths 112 is required. This knowledge may be obtained by transmitting pilot bits from each antenna to enable the receiver 114 to conduct channel estimation in a known manner. The channel estimate may then be transmitted back to the transmitter 108 to enable it to determine how to assign and code data for the different antennas 110. Alternatively, the
10 estimate could be derived from bit or block error rates of data previously received via the different radio paths 112 or by other appropriate techniques.

If the uplink and downlink channels are known to be at least approximately reciprocal, for example in a Time Division Duplex system having a coherence time greater than the closed-loop feedback delay, the channel
15 estimation may be performed by the transmitter 108 on the basis of known pilot information or similar received from the receiver 114.

Data which requires a high Quality of Service (QoS) in terms of error rate, or simply requiring the highest available bit rate, is coded and mapped to the transmit antennas 110 in such a way as to make use of one or more paths
20 112 in the radio channel offering the best SNR (or which require the lowest transmit power for the required SNR). Data requiring a lower QoS in terms of error rate may be mapped to a path or paths 112 in the radio channel offering a lower value of SNR.

The distinction between different data bits with differing requirements
25 may be made on the basis of the application from which the data emanates, for example a real-time high-quality video link may produce data to be transmitted which requires a lower error rate than voice data. In this case, instead of multiplexing the data streams from the different applications together above or at the physical layer in the transmitter, the streams would be
30 kept separate until the process of mapping their respective data bits to the transmit antennas.

A modified MIMO system implementing this function is shown in Figure 2. The multiplexer 106 is now replaced by a plurality of tagging blocks (AT) 204, each connected to an application 102, which add a tag to the data from the respective application 102 providing information about its QoS requirements. The tagging blocks 204 may alternatively use other means for associating information regarding QoS requirements with the data; for example data with different QoS requirements may be delivered to the physical layer at different time instants or on different transport channels or to different ports. This QoS information is then used by a modified coding and mapping block 206 which adjusts the coding and mapping to meet the QoS requirements so far as possible by matching them to the properties of the radio paths 112.

The system of Figure 2 could be modified if multiple applications had the same or similar requirements. In this case, data from these applications could be multiplexed above the physical layer.

Instead of, or in addition to, treating data from different applications differently, different data bits from a particular application could be coded and mapped to the transmit antennas 110 in such a way as to use particular radio paths according to differing requirements of the particular bits. As a typical example, a stream of data from a voice codec could have coded bits assigned to a range of classes depending on their level of importance. The most important bits could be transmitted via the highest quality paths 112, while the less important bits could use lower quality radio paths 112.

Figure 3 is a flow chart illustrating this method of operating a MIMO system. The process starts, at step 302, when an application 102 running on the transmitter 108 has data for transmission. The application tags segments of data depending on their requirements, and the value of this tag is checked at step 304. In this example, if the tag is 'A' (representing the most important data) the data is transmitted via a first path 112, at step 306, where the first path is a high quality path. Similarly, if the tag is 'B' (representing data of medium importance) the data is transmitted via a second path 112, at step 308, where the second path is a medium quality path. Finally, if the tag is 'C'

(representing data of low importance), the data is transmitted via a third path 112, at step 310, where the third path is a low quality path.

As a further variation, the level of FEC coding applied to the data could be varied depending on the quality of the radio paths 112 from each antenna 110. For example, a lower level of FEC could be used for data using the
5 higher-quality paths 112. This in turn could reduce the overall amount of information being transmitted and therefore enable the transmitter power to be reduced, or alternatively a higher data rate could be supported.

A range of other variations on the basic scheme are also possible. For
10 example:

- The total transmission power could be divided between the multiple transmit antennas in such a way as to equalise the received SNR from each of the paths.
- The data bits could be mapped according to the different delays of the
15 various radio paths 112, with more important or more urgent bits (e.g. closed-loop power control commands where the loop delay is critical) being transmitted on the shorter paths
- Data from a particular application could be mapped to those paths 112 which have equal or similar delays, in order to eliminate inter-symbol
20 interference.

In each case, one or more of the priority, error rate and delay required for each set of data bits delivered to the coding and mapping block 206 for transmission by the transmitter 108 could be indicated to the physical layer by means of additional "tag" bits or by any suitable alternative means, such as
25 those described above.

An advantage of a system made in accordance with the present invention over known systems is that it enables the radio channel to be better suited to the requirements of the data which is being transmitted. This may in turn result in a reduced overall transmit power, or an increase in the
30 achievable data rate.

The present invention is particularly advantageous for multi-mode transceivers which are designed to operate using multiple radio protocols.

Such appliances are likely to receive data from widely differing applications. According to the present invention, this data may be mapped to radio paths of suitable quality using one or more of the radio protocols supported by the appliance.

5 A system made in accordance with the present invention may be enhanced by using a plurality of spatially-separated receivers or transmitters. A typical example of this would be where a single mobile station maintains communication links with a plurality of base stations. A downlink data stream is divided, at a network layer level, among the base station transceivers such that
10 each supports part of the downlink data stream to a single mobile station. By making the division in the manner described above, the robustness of the overall connection will be enhanced. The plurality of data streams from the base stations are received by the mobile, and reassembled at a network level within the terminal to provide the complete application data. Uplink
15 transmissions could be primarily to a single base station or divided between all of the base stations depending on capacity and other requirements.

As such a mobile moves between base stations it will continuously come into range of new base stations and go out of range of other base stations, although overall it maintains continued connections with several base
20 stations. The handover between individual base stations can be either hard or soft, but the overall effect for the mobile is a very soft handover since it is always in stable communication with several base stations.

The present invention has been described above in the context of a MIMO system. However, it may also be applied to the situation where the
25 receiver 114 has only one antenna 110 but the transmitter 108 has a plurality of antennas 110. In such a system there are still advantages in targeting different items of data for transmission over different paths 112.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other
30 features which are already known in the design, manufacture and use of radio communication systems and component parts thereof, and which may be used instead of or in addition to features already described herein. Although claims

have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present application also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or combinations of features during the prosecution of the present application or of any further application derived therefrom.

In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. Further, the word "comprising" does not exclude the presence of other elements or steps than those listed.

CLAIMS

1. A radio communication system having a communication channel comprising a plurality of paths between a transmitter having a plurality of antennas and a receiver having at least one antenna, wherein the transmitter comprises path characterisation means for determining at least one transmission property of each path, categorisation means for assigning a category to a set of data for transmission and means responsive to said category and said at least one transmission property for determining a coding and mapping to apply the set of data to the transmitter's antennas, thereby determining over which path or paths the data will be transmitted.

2. A system as claimed in claim 1, characterised in that the receiver comprises means for performing channel estimation and means for signalling details of the output of the channel estimation to the path characterisation means.

3. A transmitter for use in a radio communication system having a communication channel comprising a plurality of paths between a transmitter having a plurality of antennas and a receiver, wherein path characterisation means are provided for determining at least one transmission property of each path, categorisation means are provided for assigning a category to a set of data for transmission, and means responsive to said category and said at least one transmission property are provided for determining a coding and mapping to apply the set of data to the transmitter's antennas, thereby determining over which path or paths the data will be transmitted.

4. A transmitter as claimed in claim 3, characterised in that data for transmission may be provided from a plurality of sources and in that the categorisation means is adapted to assign a category depending on the source of the data.

5. A transmitter as claimed in claim 3 or 4, characterised in that the categorisation means is adapted to assign different categories to respective segments of data from an application depending on at least one of their relative importance, required quality of service, data rate, tolerable
5 transmission delay and tolerable error rate.

6. A transmitter as claimed in any one of claims 3 to 5, characterised in that the path characterisation means is adapted to determine at least one of a delay, a signal-to-noise ratio, and a required transmission
10 power for a given signal-to-noise ratio or error rate for each path.

7. A transmitter as claimed in any one of claims 3 to 6, characterised in that coding means are provided for adding error correction coding to the data and for varying the coding applied depending on the path or
15 paths assigned for transmission of the data.

8. A transmitter as claimed in any one of claims 3 to 7, characterised in that means are provided for varying the transmission power of each of the antennas so as to achieve a particular signal-to-noise ratio for at
20 least one signal path.

9. A transmitter as claimed in any one of claims 3 to 8, characterised by being distributed at a plurality of spatially-separated sites, each site comprising at least one antenna.
25

10. A transmitter as claimed in any one of claims 3 to 9, characterised in that the path characterisation means are adapted to determine properties of the paths at least partly from measurements made by the receiver and signalled to the transmitter.
30

11. A method of operating a radio communication system having a communication channel comprising a plurality of paths between a transmitter

having a plurality of antennas and a receiver having at least one antenna, the method comprising the transmitter determining at least one transmission property of each path, assigning a category to a set of data for transmission and determining a coding and mapping to apply the set of data to the transmitter's antennas depending on said category and said at least one transmission property, thereby determining over which path or paths the data will be transmitted.

12. A method as claimed in claim 11, characterised by transmitting data requiring a higher quality of service over a better sub-channel than data requiring a lower quality of service.

13. A radio communication system constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

14. A transmitter constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

20

15. A method of operating a radio communication system substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

ABSTRACT

RADIO COMMUNICATION SYSTEM

5 A radio communication system comprises a communication channel
between a transmitter (108) having a plurality of antennas (110) and a receiver
(114) having at least one antenna (110). In such a system the communication
channel comprises a plurality of paths (112) having a range of characteristics.
Data for transmission is generated by one or more applications (102) and has
10 one or more categories assigned to it, for example by the addition of tags by a
tagging block (204) indicating its importance or other requirements. Depending
on the assigned categories and the characteristics of the paths (112), the data
is mapped to one or more of the transmitter's antennas (110) to select a
suitable transmission path (112).

15

(Figure 2)

THIS PAGE BLANK (USPTO)

1/1

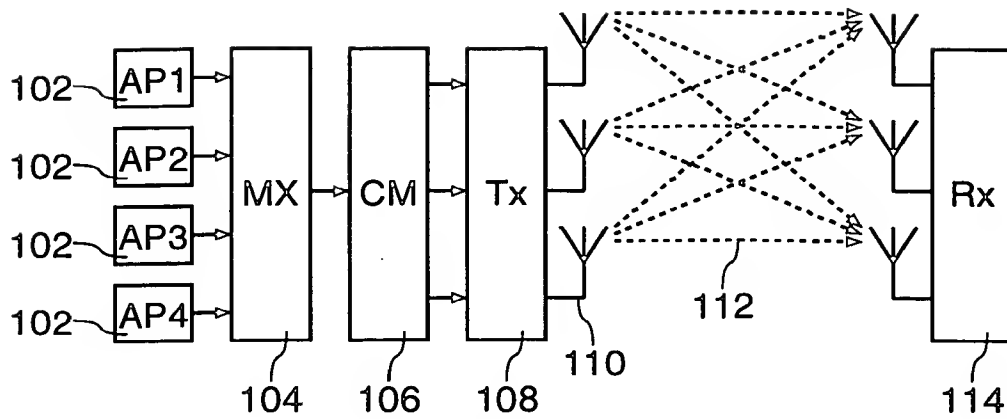


FIG. 1

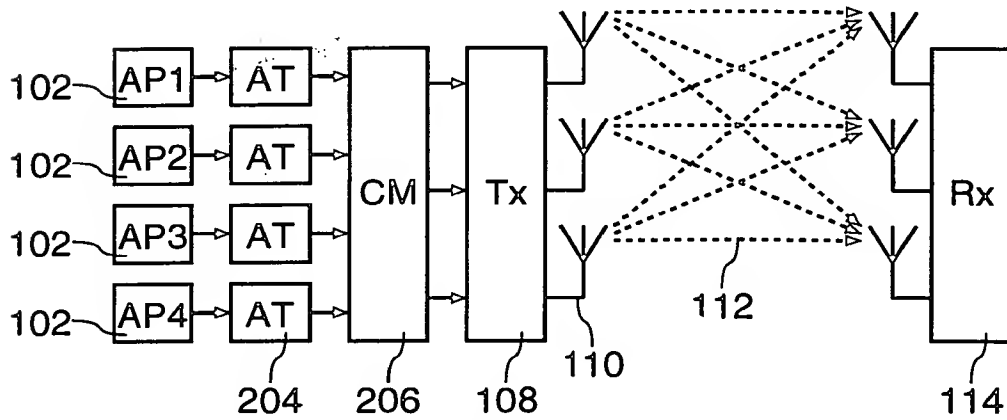


FIG. 2

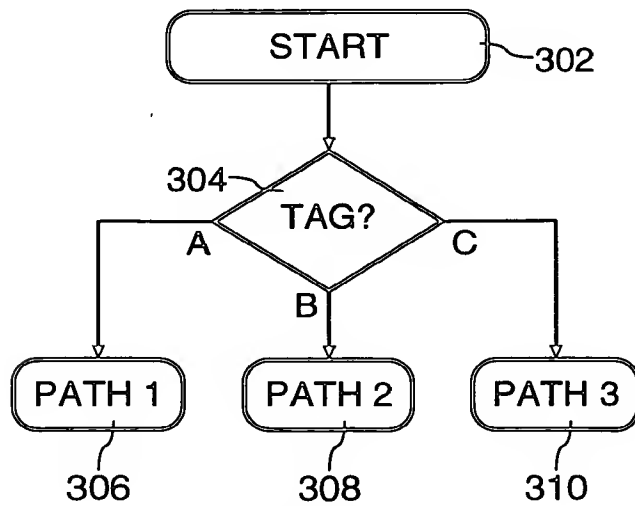


FIG. 3

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)